


## Armored Ring Spacers

PTFE • PVDF • Polypropylene • CPVC

### Standard Class 150 (150 lb.) Armored Ring Spacers

**BASE PART NUMBER:** As shown below, the BASE PART NUMBER defines the Series (three characters), the material (one character), the nominal size, and the thickness **TH**. Use a decimal number to indicate the nominal size. Then, for thicknesses up to 6", replace the **TH** with the decimal thickness. For thickness over 6", contact factory. Note that the **Class** (or **lb.**) designation does not imply a pressure rating.

For example, a 3/4" Class 150 PTFE Armored Ring Spacer x 1" thick would be **SART-0.75-1**



### Options


**LOCATING TABS:** For optional locating tabs, add to the Base Part Number the suffix **TAB**.

For example, a 3/4" Class 150 PTFE Armored Ring Spacer x 1" thick would be **SART-0.75-1-TAB**

**CLASS 300 (300 lb.) SPACERS:** For Class 300 spacers, add to the BASE PART NUMBER the suffix **300**. For other classes, contact the factory. For example, a 2" Class 300 PTFE Armored Ring Spacer x 1-1/2" thick with **TAB** option would be **SART-2-1.5-TAB-300**

Steel jacket coated with dark blue, rust resistant enamel. Other colors on request.

Part Number Key				Option
Series	Material	Nominal Size	Thickness	Class
SAR	T = PTFE, K = Kynar, P = Polypropylene, C = CPVC	0.5 - 24 Decimal Inches	Decimal Inches	300

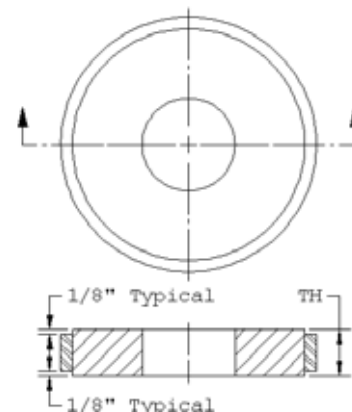


### BASE PART NUMBERS

Nominal Size	PTFE	PVDF (Kynar®)	Polypropylene	CPVC
1/2"	SART-0.5-TH	SARK-0.5-TH	SARP-0.5-TH	SARC-0.5-TH
3/4"	SART-0.75-TH	SARK-0.75-TH	SARP-0.75-TH	SARC-0.75-TH
1"	SART-1-TH	SARK-1-TH	SARP-1-TH	SARC-1-TH
1-1/2"	SART-1.5-TH	SARK-1.5-TH	SARP-1.5-TH	SARC-1.5-TH
2"	SART-2-TH	SARK-2-TH	SARP-2-TH	SARC-2-TH
2-1/2"	SART-2.5-TH	SARK-2.5-TH	SARP-2.5-TH	SARC-2.5-TH
3"	SART-3-TH	SARK-3-TH	SARP-3-TH	SARC-3-TH
4"	SART-4-TH	SARK-4-TH	SARP-4-TH	SARC-4-TH
6"	SART-6-TH	SARK-6-TH	SARP-6-TH	SARC-6-TH
8"	SART-8-TH	SARK-8-TH	SARP-8-TH	SARC-8-TH
10"	SART-10-TH	SARK-10-TH	SARP-10-TH	SARC-10-TH
12"	SART-12-TH	SARK-12-TH	SARP-12-TH	SARC-12-TH
14"	SART-14-TH	SARK-14-TH	SARP-14-TH	SARC-14-TH
16"	SART-16-TH	SARK-16-TH	SARP-16-TH	SARC-16-TH
18"	SART-18-TH	SARK-18-TH	SARP-18-TH	SARC-18-TH
20"	SART-20-TH	SARK-20-TH	SARP-20-TH	SARC-20-TH
24"	SART-24-TH	SARK-24-TH	SARP-24-TH	SARC-24-TH

For larger sizes, contact factory

Steel armor thickness is equivalent to or greater than the wall thickness of Schedule 80 Pipe.

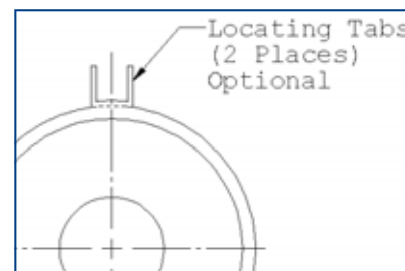

For reducing, orifice, tapered or conical bore configuration, contact factory

Call today for our  
Spacers & Flanges  
Sales Bulletin

# Armored Full-Face Flanges

PTFE • PVDF • Polypropylene • CPVC

## Standard Class 150 (150 lb.) Armored Ring Spacers

**BASE PART NUMBER:** As shown below, the BASE PART NUMBER defines the Series (three characters), the material (one character), the nominal size, and the thickness **TH**. Use a decimal number to indicate the nominal size. Then, for thicknesses up to 6", replace the **TH** with the decimal thickness. For thickness over 6", contact factory. Note that the **Class** (or **lb.**) designation does not imply a pressure rating.

For example, a 3/4" Class 150 PTFE Armored Full-Face Flange x 1" thick would be **SAFT-0.75-1**




## Options

**LOCATING TABS:** For optional locating tabs, add to the Base Part Number the suffix **TAB**.

For example, a 3/4" Class 150 PTFE Armored Full-Face Flange x 1" thick would be **SAFT-0.75-1-TAB**

**CLASS 300 (300 lb.) SPACERS:** For Class 300 spacers, add to the BASE PART NUMBER the suffix **300**. For other classes, contact the factory. For example, a 2" Class 300 PTFE Armored Full-Face Flange x 1-1/2" thick with **TAB** option would be **SAFT-2-1.5-TAB-300**

Steel jacket coated with dark blue, rust resistant enamel. Other colors on request.

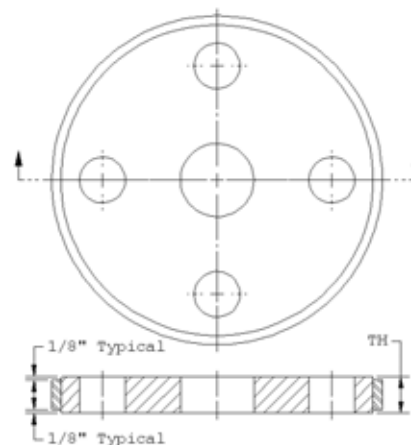

Part Number Key				Option
Series	Material	Nominal Size	Thickness	Class
SAF	T = PTFE, K = Kynar, P = Polypropylene, C = CPVC	0.5 - 24 Decimal Inches	Decimal Inches	300

## BASE PART NUMBERS

Nominal Size	PTFE	PVDF (Kynar®)	Polypropylene	CPVC
1/2"	SAFT-0.5-TH	SAFK-0.5-TH	SAFP-0.5-TH	SAFC-0.5-TH
3/4"	SAFT-0.75-TH	SAFK-0.75-TH	SAFP-0.75-TH	SAFC-0.75-TH
1"	SAFT-1-TH	SAFK-1-TH	SAFP-1-TH	SAFC-1-TH
1-1/2"	SAFT-1.5-TH	SAFK-1.5-TH	SAFP-1.5-TH	SAFC-1.5-TH
2"	SAFT-2-TH	SAFK-2-TH	SAFP-2-TH	SAFC-2-TH
2-1/2"	SAFT-2.5-TH	SAFK-2.5-TH	SAFP-2.5-TH	SAFC-2.5-TH
3"	SAFT-3-TH	SAFK-3-TH	SAFP-3-TH	SAFC-3-TH
4"	SAFT-4-TH	SAFK-4-TH	SAFP-4-TH	SAFC-4-TH
6"	SAFT-6-TH	SAFK-6-TH	SAFP-6-TH	SAFC-6-TH
8"	SAFT-8-TH	SAFK-8-TH	SAFP-8-TH	SAFC-8-TH
10"	SAFT-10-TH	SAFK-10-TH	SAFP-10-TH	SAFC-10-TH
12"	SAFT-12-TH	SAFK-12-TH	SAFP-12-TH	SAFC-12-TH
14"	SAFT-14-TH	SAFK-14-TH	SAFP-14-TH	SAFC-14-TH
16"	SAFT-16-TH	SAFK-16-TH	SAFP-16-TH	SAFC-16-TH
18"	SAFT-18-TH	SAFK-18-TH	SAFP-18-TH	SAFC-18-TH
20"	SAFT-20-TH	SAFK-20-TH	SAFP-20-TH	SAFC-20-TH
24"	SAFT-24-TH	SAFK-24-TH	SAFP-24-TH	SAFC-24-TH

For larger sizes, contact factory

Steel armor thickness is equivalent to or greater than the wall thickness of Schedule 80 Pipe.

For reducing, orifice, tapered or conical bore configuration, contact factory

