


Sizes of MICROMOLD Class 150 and 300 PTFE Gaskets, Spacers and Flanges


ID			OD & Bolt Holes									
Class 150 & 300			Class 150					Class 300				
Pipe Size	Old Std.	New Std.	Ring Type	Full- Face	Bolt Holes			Ring Type	Full- Face	No.	Dia.	Bolt Circle
					No.	Dia.	Bolt Circle					
1/2"	1/2"	27/32"	1-7/8"	3-1/2"	4	5/8"	2-3/8"	2-1/8"	3-3/4"	4	5/8"	2-5/8"
3/4"	3/4"	1-1/16"	2-1/4"	3-7/8"	4	5/8"	2-3/4"	2-5/8"	4-5/8"	4	3/4"	3-1/4"
1"	1"	1-5/16"	2-1/2"	4-1/4"	4	5/8"	3-1/8"	2-7/8"	4-7/8"	4	3/4"	3-1/2"
1-1/4"	1-1/4"	1-21/32"	3"	4-5/8"	4	5/8"	3-1/2"	3-1/4"	5-1/4"	4	3/4"	3-7/8"
1-1/2"	1-1/2"	1-29/32"	3-1/4"	5"	4	5/8"	3-7/8"	3-3/4"	6-1/8"	4	7/8"	4-1/2"
2"	2"	2-3/8"	4"	6"	4	3/4"	4-3/4"	4-3/8"	6-1/2"	8	3/4"	5"
2-1/2"	2-1/2"	2-7/8"	4-7/8"	7"	4	3/4"	5-1/2"	5-1/8"	7-1/2"	8	7/8"	5-7/8"
3"	3"	3-1/2"	5-1/4"	7-1/2"	4	3/4"	6"	5-7/8"	8-1/4"	8	7/8"	6-5/8"
4"	4"	4-1/2"	6-1/2"	9"	8	3/4"	7-1/2"	7-1/8"	10"	8	7/8"	7-7/8"
5"	5"	5-9/16"	7-1/2"	10"	8	7/8"	8-1/2"	8-1/2"	11"	8	7/8"	9-1/4"
6"	6"	6-5/8"	8-1/2"	11"	8	7/8"	9-1/2"	9-7/8"	12-1/2"	12	7/8"	10-5/8"
8"	8"	8-5/8"	10-1/2"	13-1/2"	8	7/8"	11-3/4"	12-1/8"	15"	12	1"	13"
10"	10"	10-3/4"	13"	16"	12	1"	14-1/4"	14-1/4"	17-1/2"	16	1-1/8"	15-1/4"
12"	12"	12-3/4"	16"	19"	12	1"	17"	16-5/8"	20-1/2"	16	1-1/4"	17-3/4"
14"	14"	14"	17"	21"	12	1-1/8"	18-3/4"	19-1/8"	23"	20	1-1/4"	20-1/4"
16"	16"	16"	19"	23-1/2"	16	1-1/8"	21-1/4"	21-1/4"	25-1/2"	20	1-3/8"	22-1/2"
18"	18"	18"	21"	25"	16	1-1/4"	22-3/4"	23-1/2"	28"	24	1-3/8"	24-3/4"
20"	20"	20"	23"	27-1/2"	20	1-1/4"	25"	25-5/8"	30-1/2"	24	1-3/8"	27"
24"	24"	24"	27"	32"	20	1-3/8"	29-1/2"	30-3/8"	36"	24	1-5/8"	32"

PTFE Envelope Gasket Construction:

SLIT

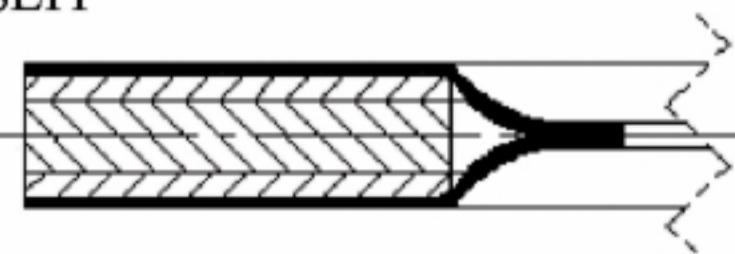


FORMED SHIELD

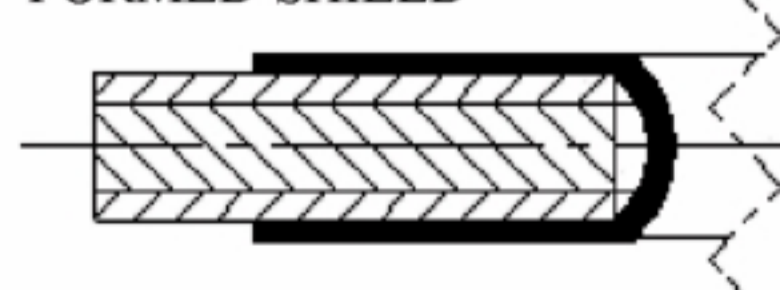

MACHINED



DOUBLE JACKET

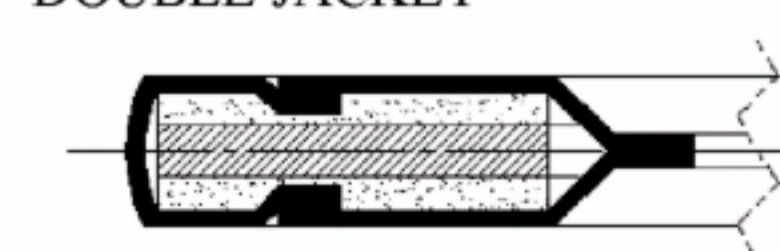

Note: Unless otherwise specified, gaskets, spacers and flanges are manufactured to Old Standard.

Fillers: Common fillers used in Micromold PTFE Envelope Gaskets

- CNA** Compressed non-asbestos sheet (physical properties conform to ASTM F104 Class P-1141-A)
- NA** Compressible non-asbestos sheet
- CLT** CNA core faced on both sides with NA
- CRT** Corrugated cold rolled (or stainless) steel core faced on both sides with NA
- NEO** Neoprene rubber



MICROMOLD PRODUCTS, INC.
 200 Corporate Blvd. South, Yonkers, NY 10701
 email: mpi@micromold.com www.micromold.com
 (914) 969-2850 FAX (914) 969-2736