


FLUOR-O-FLO™ PTFE & PVDF Tank Adapters (Bulkhead Fittings)

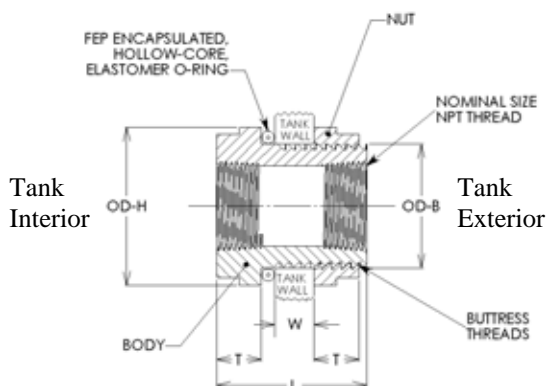

Nominal Pipe Size	PTFE Part No. (Note 1)	PVDF FNPT Threaded Part No.	PVDF IPS Socket Weld Part No.	PVDF Metric Socket Weld Part No.	OD-H	T	OD-B	L	W MAX (Note 2)	MIN. TANK DIA. (Note 3)	Weight (lb.)
1/8"	F-TA01	N/A	N/A	N/A	1-5/8"	1/2"	1-1/8"	1-3/4"	1/2"	12"	0.20
1/4"	F-TA02	N/A	N/A	N/A	1-11/16"	1/2"	1-3/16"	1-3/4"	1/2"	13"	0.20
3/8"	F-TA03	FK-TA03FT	FK-TA03SI	FK-TA03SM	1-13/16"	1/2"	1-9/32"	1-3/4"	1/2"	15"	0.20
1/2"	F-TA04	FK-TA04FT	FK-TA04SI	FK-TA04SM	2-1/16"	5/8"	1-1/2"	2-1/8"	5/8"	19"	0.35
3/4"	F-TA06	FK-TA06FT	FK-TA06SI	FK-TA06SM	2-3/8"	3/4"	1-13/16"	2-1/2"	3/4"	25"	0.55
1"	F-TA08	FK-TA08FT	FK-TA08SI	FK-TA08SM	2-5/8"	3/4"	2-1/16"	2-1/2"	3/4"	32"	0.65
1-1/4"	F-TA10	FK-TA10FT	FK-TA10SI	FK-TA10SM	2-7/8"	3/4"	2-3/8"	2-1/2"	3/4"	44"	0.70
1-1/2"	F-TA12	FK-TA12FT	FK-TA12SI	FK-TA12SM	3-1/8"	3/4"	2-5/8"	2-1/2"	3/4"	53"	0.80
2"	F-TA16	FK-TA16FT	FK-TA16SI	FK-TA16SM	3-5/8"	7/8"	3-1/8"	2-7/8"	7/8"	73"	1.15
2-1/2"	F-TA20	FK-TA20FT	FK-TA20SI	FK-TA20SM	4-1/4"	1-1/8"	3-5/8"	3-3/8"	7/8"	97"	2.01
3"	F-TA24	FK-TA24FT	FK-TA24SI	FK-TA24SM	5-1/8"	1-1/4"	4-1/2"	3-3/4"	1"	146"	2.95
4"	F-TA32	FK-TA32FT	FK-TA32SI	FK-TA32SM	6-1/4"	1-3/8"	5-1/2"	4"	1"	216"	4.52

Note 1: Standard fitting includes FEP encapsulated, 0.210" diameter, silicone o-ring. PFA encapsulation, PTFE, or other o-ring materials available.

Note 2: Body can be made longer to accommodate thicker tank walls.

Note 3: As supplied, fittings are suitable for use with flat-wall or most cylindrical, smooth-wall tanks to min. dia. shown. Custom adapters are available to permit use with smaller diameter tanks.

Call today for our FLUOR-O-FLO™
Tank Adapters Sales Bulletin